

CAT 3508B Land Electric-Drive Drilling Module

<https://www.zeppelin-powersystems.com/de/en/>

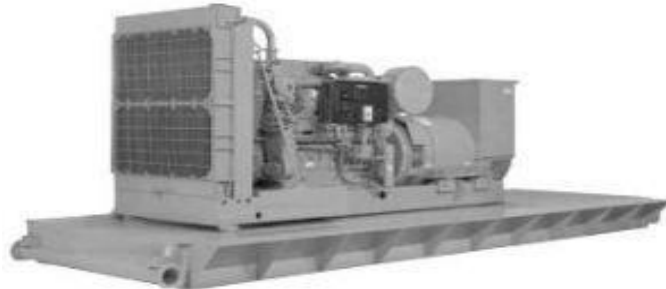


Image shown with optional attachments.

Minimum Rating	835 ekW
Maximum Rating	835 ekW
Emissions	Non-certified
Weight	15.352 kg
Generator	SR4B
Oil Change Interval	500 h
Fuel System	EUI
Displacement	34,5 l
Bore	170 mm
Engine Control and Protection	ADEM A3
Stroke	190 mm
Aspiration	Turbocharged-Aftercooled
Voltage	600
Width	2.319 mm
Height	1.596 mm
Length	4.986 mm
Lube Oil System - Refill	227,1 l
Cooling System - Engine	103 l
Maximum Rating	1.194 kVA
Minimum Rating	1.194 kVA
Rated Speed	1500 rpm

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.