


CAT 3516E Low Voltage Generator Set

<https://www.zeppelin-powersystems.com/de/en/>

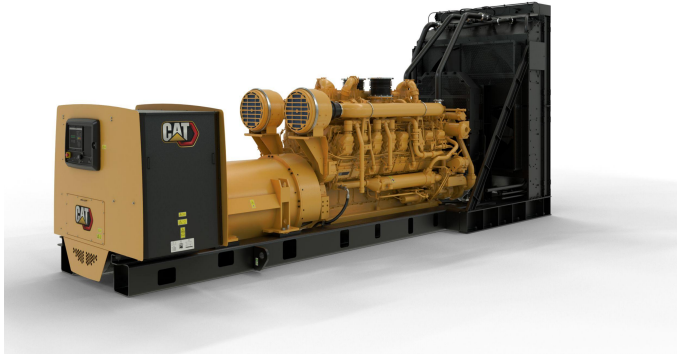

Minimum Rating	2750 kVA
Maximum Rating	3000 kVA (3100 kVA without fan)
Emissions/Fuel Strategy	Low Fuel Consumption
Voltage	380 to 11000 volts
Frequency	50 Hz
Speed	1500 rpm
Duty Cycle	Standby, Mission Critical, Prime
Engine Model	3516E, SCAC, V-16, 4-Stroke, Water-Cooled Diesel
Bore	170 mm
Stroke	215 mm
Displacement	78,1 l
Compression Ratio	14:01
Aspiration	TA
Fuel System	Electronic unit injection
Governor Type	Adem™ 5
Length - Maximum	7.538 mm
Width - Maximum	2.216 mm
Height - Maximum	3.391 mm
Dry Weight - Genset (maximum)	19.750 kg
Maximum Rating	3.000 kVA
Minimum Rating	2.750 kVA
Rated Speed	1500 rpm

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.

CAT 3516E Low Voltage Generator Set

