


## CAT C175-20

<https://www.zeppelin-powersystems.com/de/en/>

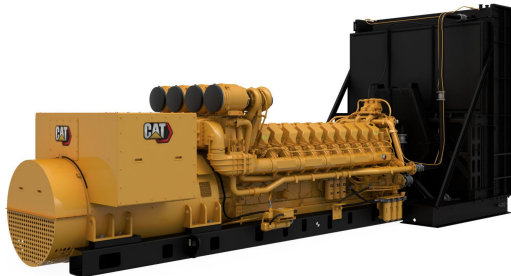

Minimum Rating	3150 kVA
Maximum Rating	4000 kVA
Emissions/Fuel Strategy	Low Fuel, Low Emissions
Voltage	3300 to 11000 Volts
Frequency	50 Hz
Speed	1500 RPM
Duty Cycle	Standby, Mission Critical, Prime, Continuous
Engine Model	C175-20 SCAC, V-20, 4-Stroke Water-Cooled Diesel
Bore	175 mm
Stroke	220 mm
Displacement	105,8 l
Compression Ratio	15:03:01
Aspiration	Turbo Aftercooled
Fuel System	Common Rail
Governor Type	ADEM™ A4
Length - Minimum	6.642,8 mm
Length - Maximum	8.397 mm
Width - Minimum	2.170,2 mm
Width - Maximum	8.397 mm
Height - Minimum	2.224,3 mm
Height - Maximum	3.827 mm
Dry Weight - Genset (minimum)	25.000 kg
Dry Weight - Genset (maximum)	30.000 kg
Rated Speed	1500 rpm
Minimum Rating	3.150 kVA
Maximum Power	4.000 kW

**This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.**

## CAT C175-20

