


## CAT C280-16 Offshore Generator Set (Front-Mounted Turbo)

<https://www.zeppelin-powersystems.com/de/en/>

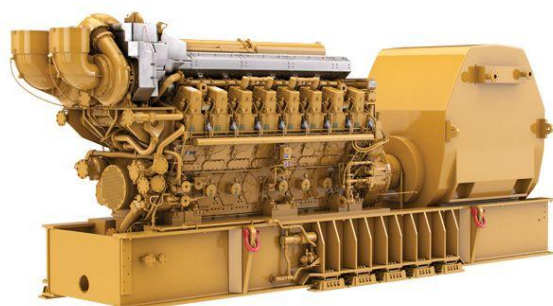

Minimum Rating	5.600 ekW
Maximum Rating	5.730 ekW
Emissions	IMO Tier 2 / EPA Marine Tier 2
Displacement	296 l
Aspiration	Turbocharged-Aftercooled
Engine Control	Dual ADEM™ A4
Bore	280 mm
Fuel System	EUI
Oil Change Interval	1.000 h
Stroke	300 mm
Weight	66.000 kg
Generator Set Control	Cat® Alarm and Protection System
Length	10.283 mm
Width	2.800 mm
Height	4.092 mm
Cooling System - Engine	1.245 l
Lube Oil System - Refill	1.677 l
Maximum Rating	5.730 kVA
Minimum Rating	5.600 kVA
Rated Speed	900 rpm

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.