


CAT Cat® C13 Industrial Diesel Engine

<https://www.zeppelin-powersystems.com/de/en/>

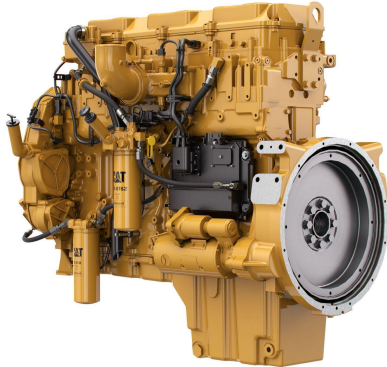

Maximum Power	388 kW
Maximum Torque	2.215 Nm @ 1600 rpm
Rated Speed	1800-2100 rpm
Minimum Power	287 kW
Emissions	China Nonroad III, U.S. EPA Tier 3 Equivalent or U.S. EPA Tier 2 Equivalent, EU Stage IIIA Equivalent or EU Stage II Equivalent
Engine Configuration	Inline 6, 4-Stroke-Cycle Diesel
Bore	130 mm
Stroke	157 mm
Displacement	12,5 l
Compression Ratio	17.3:1
Aspiration	Turbocharged Aftercooled (TA)
Combustion System	Direct Injection
Rotation from Flywheel End	Counterclockwise
Aftertreatment	-
Length	1.295 mm
Width	1.186 mm
Height	1.054 mm
Weight - Net Dry - Basic Operating Engine Without Optional Attachments	908 kg

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.