


CAT Cat® C18 Industrial Diesel Engine

<https://www.zeppelin-powersystems.com/de/en/>

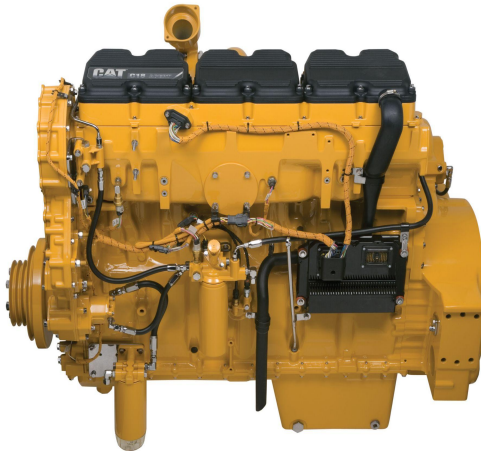

Maximum Power	597 kW
Maximum Torque	3.655 Nm @ 1600 rpm
Rated Speed	1800-2100 rpm
Minimum Power	429 kW
Emissions	China Nonroad III, U.S. EPA Tier 3 equivalent or U.S. EPA Tier 2 equivalent, EU Stage IIIA equivalent, or Non-certified
Engine Configuration	Inline 6, 4-Stroke-Cycle Diesel
Bore	145 mm
Stroke	183 mm
Displacement	18,1 l
Compression Ratio	16.3:1
Aspiration	Turbocharged Aftercooled (TA)
Combustion System	Direct Injection
Rotation from Flywheel End	Counterclockwise
Aftertreatment	-
Length	1.414 mm
Width	974 mm
Height	1.257 mm
Weight - Net Dry - Basic Operating Engine Without Optional Attachments	1.673 kg

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.