


## CAT Cat C2.2 Marine Generator Set

<https://www.zeppelin-powersystems.com/de/en/>

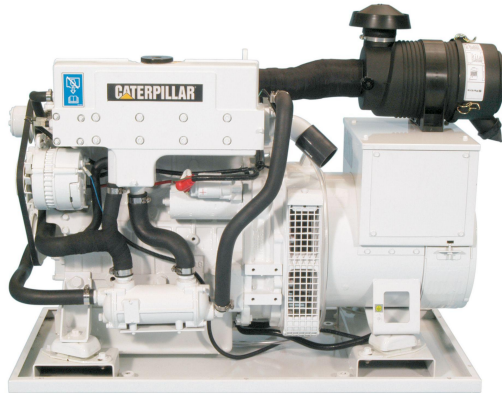

Minimum Rating	16 ekW (16kVA)
Maximum Rating	27 ekW (27 kVA)
Frequency	50 Hz or 60 Hz
Speed	1500 rpm (50Hz) or 1800 rpm (60 Hz)
Engine Model	C2.2, In-line 4, 4-Stroke-Cycle Diesel
Aspiration	Naturally Aspirated
Bore	84 mm
Stroke	100 mm
Displacement	2,2 l
Governor Type	Electrical Ischronous
Fuel System	Fuel filter – RH or LH service, fuel priming, fuel transfer pump, flexible fuel lines
Emissions/Fuel Strategy	EPA Tier 3, IMO NST, EU IW
Excitation	AREP
Pitch	2/3 pitch
Number of Poles	4
Number of Leads	4
Insulation	Class H
Voltage Regulation	±0.5%
Frame Size	2,2
IP Rating	23
Wave Form Deviation - Line to Line	<2%
Voltage Regulator	Steady State
Minimum Approximate Weight	389 kg
Height - Enclosed Set	775 mm
Height - Open Set	825 mm
Width - Open Set	521 mm
Maximum Approximate Weight	466 kg
Length - Open Set	1.147 mm
Width - Enclosed Set	608 mm
Length - Enclosed Set	1.170 mm

## CAT Cat C2.2 Marine Generator Set

Maximum Rating	27 kVA
Minimum Rating	16 kVA
Rated Speed	1500 rpm (50Hz) or 1800 rpm (60 Hz)

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.