


CAT Cat® C2.8 Industrial Diesel Engine

<https://www.zeppelin-powersystems.com/de/en/>

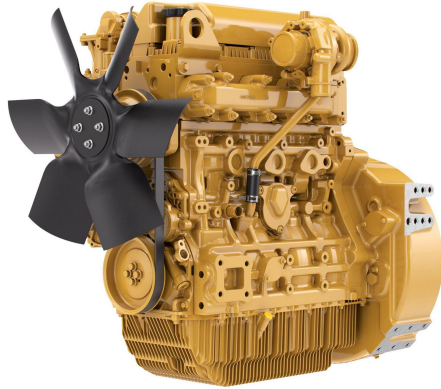

Maximum Power	55 kW
Maximum Torque	300 Nm @ 1600 rpm
Rated Speed	2200-2400 rpm
Minimum Power	50 kW
Emissions	UN ECE R96 Stage IIIA, Brazil MAR-1
Engine Configuration	Inline 4, 4-Stroke-Cycle Diesel
Bore	90 mm
Stroke	110 mm
Displacement	2,8 l
Compression Ratio	17.0:1
Aspiration	Turbocharged (T) and Turbocharged Aftercooled (TA)
Combustion System	Direct Injection
Rotation from Flywheel End	Counterclockwise
Aftertreatment	-
Length	633 mm
Width	538 mm
Height	786 mm
Weight - Net Dry - Basic Operating Engine	320 kg
Without Optional Attachments	

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.