


CAT Cat® C4.4 Industrial Power Unit

<https://www.zeppelin-powersystems.com/de/en/>

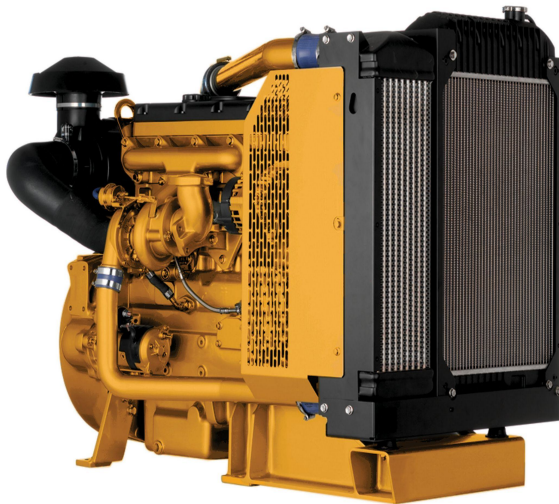

| | |
|----------------------------|---------------------------------|
| Weight | 465 kg |
| Maximum Power | 81 kW |
| Rated Speed | 2200 rpm |
| Minimum Power | 61 kW |
| Emissions | UN ECE R96 Stage IIIA |
| Engine Configuration | Inline 4, 4-Stroke-Cycle Diesel |
| Bore | 105 mm |
| Stroke | 127 mm |
| Displacement | 4,4 l |
| Compression Ratio | 18.2:1 |
| Aspiration | Turbocharged (T) |
| Rotation from Flywheel End | Counterclockwise |
| Aftertreatment | - |
| Length | 1.260 mm |
| Width | 734 mm |
| Height | 964 mm |
| Minimum Power | 75 kW |
| Maximum Power | 106 kW |

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.

CAT Cat® C4.4 Industrial Power Unit

