


## CAT Cat® C9 Industrial Power Unit

<https://www.zepelin-powersystems.com/de/en/>

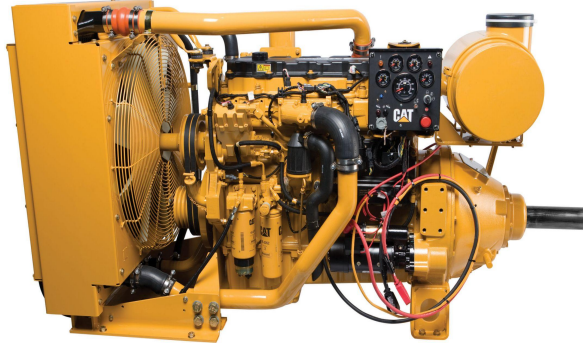

Maximum Power	261 kW
Rated Speed	1800-2200 rpm
Minimum Power	205 kW
Emissions	China Stage II, U.S. EPA Tier 2 Equivalent or U.S. EPA Tier 3 Equivalent, EU Stage II Equivalent or EU Stage IIIA Equivalent
Engine Configuration	Inline 6, 4-Stroke-Cycle Diesel
Bore	112 mm
Stroke	149 mm
Displacement	8,8 l
Compression Ratio	16.3:1
Aspiration	Turbocharged Aftercooled (TA)
Rotation from Flywheel End	Counterclockwise
Aftertreatment	-
Length	2.174 mm
Width	988 mm
Height	2.008 mm
Weight	1.490 kg

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.