


## CAT 3612 Generator Set (Medium Speed)

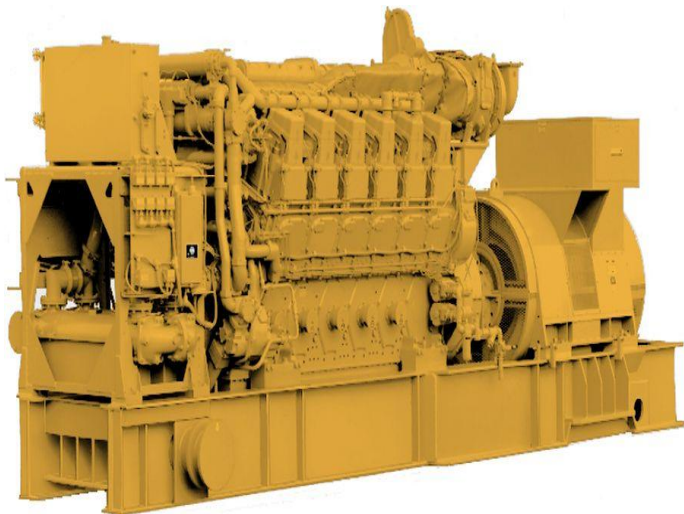

<https://www.zeppelin-powersystems.com/de/en/>

Minimum Rating	4400 kVA
Maximum Rating	4850 kVA
Emissions/Fuel Strategy	Low Fuel Consumption
Frequency	50 Hz
Speed	750 & 1000 rpm
Duty Cycle	Prime, Continuous
Engine Model	3612 V-12,4-Stroke Water-Cooled Diesel
Bore	280 mm
Stroke	300 mm
Displacement	222 l
Compression Ratio	13:01
Aspiration	TA
Fuel System	Direct unit injection
Governor Type	Generator Set Monitoring System (GMS)
Length - Maximum	10.261,7 mm
Width - Maximum	2.530,3 mm
Height - Maximum	3.977,7 mm
Dry Weight - Genset (maximum)	51.230 kg
Maximum Rating	4.850 kVA
Minimum Rating	4.400 kVA
Rated Speed	750 & 1000 rpm

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.